



Industrial Access Point 5375Mbps Tri-Band

GP-AP5400AX-FS Series



INDUSTRIAL NETWORK SOLUTION SPECIALIST
WWW.GPSENKE.COM



Introduction

GP-AP5400AX-FS Series is a high-performance, high-speed tri-band wireless industrial outdoor access point. It used Qualcomm chipset and supports 802.11 b / g / n / ac /ax, the speed up to 5376M. It designed and integrated with OFDMA, UL, MU-MIMO, 1024QAM and etc technical. The maximum transmission power of a single radio frequency can reach 500mW, which can effectively solve various problems of outdoor WLAN coverage and improve the accuracy and stability of WLAN outdoor coverage.

GP-AP3000AX-FS Series compliant with IP67 waterproof and dustproof standards and approvals covering operating temperature, power input voltage, surge, ESD, and vibration. It can be widely used in wireless network coverage in industrial outdoor places such as oil&gas, Mining industry, Chemical Refinery factory, intelligent warehousing, automation factory, underground pipe gallery, school, park, scenic spot, amusement park and etc.

Main Feature

- Support 802.11 b / g / n / ac Standard
- Support 802.11 ax Standard and 4-Streams 5376Mbps Speed
- Support Easy Mesh Function
- Support AP FAT and AP FIT Switching
- Support 4×4 MU-MIMO
- Support OFDMA , BSS Color and TWT Technical
- Support Open System, Shared Key, WPA, WPA-PSK, WPA2-Enterprise, WPA2-PSK
- Support Gigabit SFP Port
- Support Gigabit RJ45 Ethernet
- Support IEEE 802.3 af & at PoE Power Supply
- Support Diversified Access Authentication Methods
- Support IP67 Protection-Level

Software Parameter

| | | | |
|--------------|--|---|-----------------------------------|
| WLAN | Frequency Band | 2.4GHz | 5GHz |
| | Channel Bonding | 40MHz | 160MHz |
| | MU-MIMO | Support | Support |
| | OFDMA | Support | Support |
| | TWT | Support | Support |
| | 2*2400Mbps(PHY) | NA | Support |
| | 575Mbps(PHY) | Support | NA |
| | A-MPDU | Support | Support |
| | MLD | Support | Support |
| | MRC | Support | Support |
| | STBC | Support | Support |
| | LDPC | Support | Support |
| | MAX Virtual AP | Single Band-- Support 16 Virtual AP | |
| | Max Access Users | 1024 (Influenced by Environment Fators) | |
| | Max Access Spend | 2.4GHz: 575Mbps 5GHz: 4800Mbps | |
| | RTS/CTS | Support | |
| | CTS-to-self | Support | |
| | Hidden SSID | Support | |
| Mesh | Terminal Aging/Heartbeat Detection | Support | |
| | Mesh Networking | Support | |
| | Specify the radio frequency as the backhaul link | Support | |
| | Link self-healing | Support | |
| | Link monitoring | Generate topology on AC (GPSENKE Access Controller) to achieve real-time monitoring | |
| | Muti-MESH Networking | Support Specify MESH ID, distinguishing multiple MESH networks by MESH ID | |
| | Multiple data exports | Support Muti-Data access (Under same Mesh Network) | |
| Working Mode | Gateway Mode, FAT/FIT AP | | |
| | Roaming | Roaming Switch | Support 802.11k, 802.11v, 802.11r |
| | | | LAY2/LAY3 Roaming |




| | | |
|-----------------|--|--|
| RF | Load Balancing | Load balancing is supported based on the number of users and user traffic |
| | 5G Priority | Support |
| | Automatic Channel Selection | Support |
| | Automatic Power Regulation | Support |
| | Intelligent Speed Select | Support |
| | Time Fair Scheduling | Support |
| Security | Encryption | Support 64/128 bit WEP、Dynamic WEP、TKIP、CCMP encryption |
| | Authentication Method | Cooperate With AC Support WPA、WPA-PSK、WPA2- Enterprise、WPA2-PSK、WPA3、MAC address Verify、Web Verify、PPPoE Verification and etc Methods |
| | L2 Isolation of Wireless Users | Support |
| | wIDS | Support |
| WAPI | Authentication | Support WAPI , WAPI PSK |
| | | Support X.509 v3 Authentication Format: PEM (X.509) 、PKCS#12 (X.509) ; |
| | | Support Exporting Authentication Files |
| | Key Security | AC generate 'WAPI key pair' to request Authentication Supports ECC192 key Algorithm Approved by the National Cryptography Authority |
| AAA | RadiusClient | Support |
| | Authentication Server Multi-domain configuration | Support |
| | Authentication Server Backup | Support |
| L2/L3 | IP Address | Static IP and DHCP dynamically obtain addresses |
| | IPv6 | Support |
| | ACL | Support |
| | DHCP server | Support (Router Mode) |
| | NAT | Support (Router Mode) |
| Service Quality | WMM(802.11e) | Support |
| | Priority Mapping | Support |
| | QoS Policy Mapping | Support |
| | Bandwidth Managed | Support Bandwidth Speed Limitation based on SSID and Users |
| | Call Admission Control (CAC) | Support |
| Maintenance | Network Management | SNMPV1/V2c/V3、Trap、Telnet、FTP/TFTP、WEB |

Hardware Parameter

| | | |
|--------------------------------|----------|---|
| Size | | 238mm × 214mm × 58mm (Not including waterproof connector) |
| Weight | | 1.2kg |
| Port | Ethernet | 1 × 10/100/1000Base-T PoE/RJ45 Port |
| | Fiber | 1 × 1000M SFP Fiber Port |
| | console | 1 |
| Antenna (Optional) | External | 2.4G: ≥ 10 dBi@ 2.4~2.4835GHz , Horizontal angle 60 ° , Vertical 30 ° 5G: ≥ 10 dBi@ 5.15~5.85GHz, Horizontal angle 80 ° , Vertical 30 ° |
| | Build-In | 6 × N-K Type Connector Port (2.4GHzx2 , 5GHzx4) Built-in lightning protection |
| Working Band | 2.4G | 802.11ax/n/g/b: 2.4GHz-2.483GHz (CHINA) |
| | 5G | 802.11 ax/ac/n/a: 5.150GHz-5.350GHz 5.725GHz-5.850GHz (CHINA) |
| Modulation Technology | | OFDM : BPSK@6/9Mbps、QPSK@12/18Mbps、16-QAM@24Mbps、 64-QAM@48/54Mbps DSSS : DBPSK@1Mbps、 DQPSK@2Mbps、CCK@5.5/11Mbps MIMO-OFDM (11n) : MCS 0-15 MIMO-OFDM (11ac) : MCS 0-9 MIMO-OFDM (11ax) : MCS 0-11 |
| Modulation Method | | 11b: DSS:CCK@5.5/11Mbps,DQPSK@2Mbps,DBPSK@1Mbps 11a/g: OFDM:64QAM@48/54Mbps,16QAM@24Mbps, QPSK@12/18Mbps,BPSK@6/9Mbps 11n: MIMO-OFDM:BPSK,QPSK,16QAM,64QAM 11ac/ac wave2: MIMO-OFDM:BPSK,QPSK,16QAM,64QAM,256QAM 11ax: MIMO-OFDM: BPSK,QPSK,16QAM,64QAM,256QAM,1024QAM |
| MAX Transmit Power | | 2.4Hz: 27dBm 5.8Hz: 30dBm |
| Adjustable Granularity | | 1dBm |
| Operating Temperature | | -40°C ~ 75°C |
| Storage Temperature | | -40°C ~ 85°C |
| Operating Humidity | | 0%~95% (Non-condensing) |
| IP Protection Level | | IP67 |
| Power Supply | | Support 802.3at Power Supply |
| Consumption(Client5.8G) | | \leq 19W |
| MTBF | | >250000H |

Appearance & Accessories


SFP (Fiber Port)

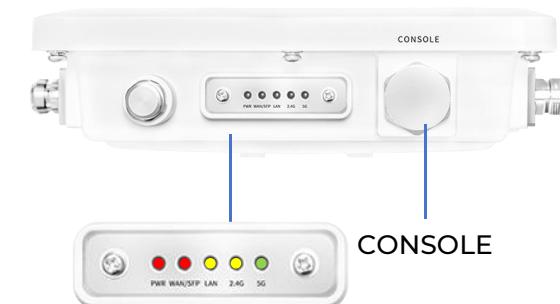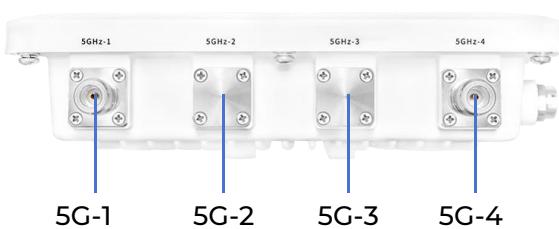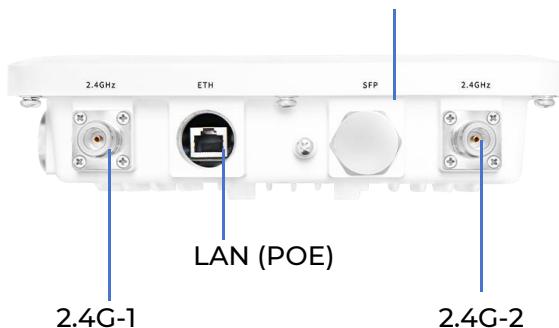

Packing*1



Device*1

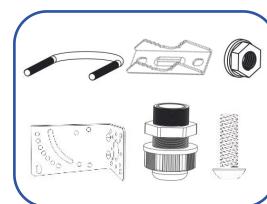

Accessories*1



Manual*1

Model Selection

| Model | GP-AP5400AX-Q-FS | GP-AP5400AX-D-FS |
|-----------------------------|------------------|------------------|
| Speed | | 5375M |
| External Antenna (Optional) | ● | ○ |
| Build-in Antenna | ○ | ● |

INDUSTRIAL NETWORK
SOLUTION SPECIALIST



© GPSENKE(CHINA) | All rights reserved.
Update Time: 2024.6.1

This document and any part thereof may not be reproduced or used in any manner without the express written permission of GPSENKE (China).

Product specifications are subject to change without prior notice.
Please visit our website for the latest product information.